

DrägerSensor® XXS NO₂

Order no. 68 10 884

Used in	Plug & Play	Replaceable	Guaranty	Expected sensor life	Selective filter
Dräger X-am 2500	no	yes	1 year	> 2 years	no
Dräger X-am 2800	no	yes	1 year	> 2 years	no
Dräger X-am 5000	no	yes	1 year	> 2 years	no
Dräger X-am 5600	no	yes	1 year	> 2 years	no
Dräger X-am 3500/8000	no	yes	1 year	> 2 years	no

MARKET SEGMENTS

Inorganic chemicals, metal processing, oil and gas, petrochemical, steel industry, shipping, rocket engineering, mining and tunneling.


TECHNICAL SPECIFICATIONS

Detection limit:	0.2 ppm
Resolution:	0.1 ppm
Measurement range:	0 to 50 ppm NO ₂ (nitrogen dioxide)
Response time:	≤ 15 seconds (t ₉₀)
Precision	
Sensitivity:	≤ ± 2% of measured value
Long-term drift, at 20°C (68°F)	
Zero point:	≤ ± 1 ppm/year
Sensitivity:	≤ ± 2% of measured value/month
Warm-up time:	≤ 15 minutes
Ambient conditions	
Temperature:	(-30 to 50)°C (-22 to 122)°F
Humidity:	(10 to 90)% RH
Pressure:	(700 to 1,300) hPa
Influence of temperature	
Zero point:	≤ ± 1 ppm
Sensitivity:	≤ ± 5% of measured value
Influence of humidity	
Zero point:	No effect
Sensitivity:	≤ ± 0.2% of measured value/% RH
Test gas:	approx. 1 to 45 ppm NO ₂


SPECIAL CHARACTERISTICS

This sensor's advantages include a fast response time and excellent repeatability. This sensor enables a selective measurement of NO₂. NO concentrations < 20 ppm do not influence the measurement results, thus a selective NO₂ measurement is possible.

Sensor reaction to NO₂ at 20 °C/68 °F
Flow = 0.5 l/min, 4 ppm NO₂

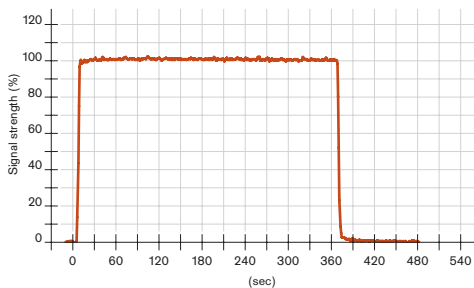

Repeatability of NO₂ sensors
with 4 ppm NO₂

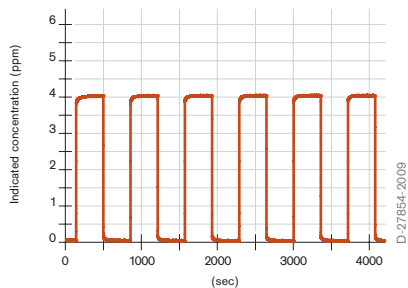

The values shown in the following table are standard and apply to new sensors. The values may fluctuate by $\pm 30\%$. The sensor may also be sensitive to additional gases (for more information, please contact Dräger). Gas mixtures may be displayed as the sum of all components. Gases with a negative cross sensitivity may displace an existing concentration of NO₂. To be sure, please check if gas mixtures are present.

RELEVANT CROSS-SENSITIVITIES

Gas/vapor	Chem. symbol	Concentration	Display in ppm NO ₂
Acetylene	C ₂ H ₂	100 ppm	≤ 10 ⁽⁻⁾
Ammonia	NH ₃	50 ppm	No effect
Carbon dioxide	CO ₂	1.5 Vol.-%	No effect
Carbon monoxide	CO	200 ppm	No effect
Chlorine	Cl ₂	10 ppm	≤ 5
Ethanol	C ₂ H ₅ OH	250 ppm	No effect
Hydrogen	H ₂	1,000 ppm	No effect
Hydrogen chloride	HCl	20 ppm	≤ 10 ⁽⁻⁾
Hydrogen cyanide	HCN	60 ppm	≤ 10 ⁽⁻⁾
Hydrogen sulfide	H ₂ S	20 ppm	≤ 100 ⁽⁻⁾
Isobutylene	(CH ₃) ₂ CCH ₂	100 ppm	≤ 0.8 ⁽⁻⁾
Methane	CH ₄	1 Vol.-%	No effect
Nitrogen monoxide	NO	20 ppm	No effect
Ozone	O ₃	0.5 ppm	0.5
Phosphine	PH ₃	1 ppm	≤ 4 ⁽⁻⁾
Sulphur dioxide	SO ₂	20 ppm	≤ 20 ⁽⁻⁾

(-) Indicates negative deviation